

SINGLE BRIDGE RECTIFIERS

Features

- ◆ Glass passivated die construction
- ◆ Low forward voltage drop
- ◆ High current capability
- ◆ High surge current capability
- ◆ Plastic material-UL flammability 94V-O

Mechanical Data


Case : JEDEC KBP Molded plastic body

Terminals : Solder plated, solderable per MIL-STD-750, Method 2026

Polarity : Polarity symbol marking on body

Mounting Position : Any

Weight : 0.069 ounce, 1.95 grams

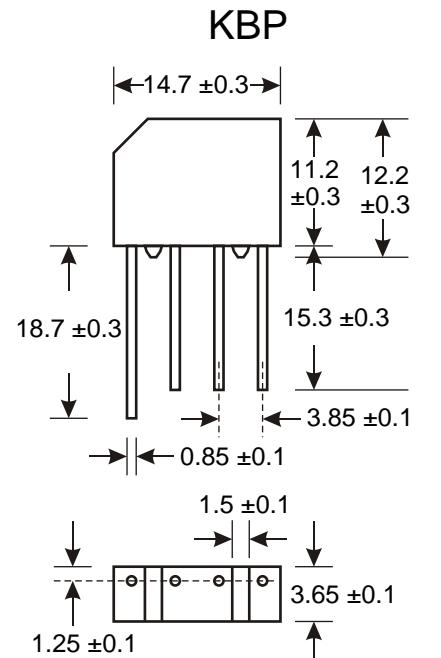

Dimensions in millimeters (1mm=0.0394")

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	KBP4005	KBP401	KBP402	KBP404	KBP406	KBP408	KBP410	UNITS
Marking Code									
Maximum repetitive peak reverse voltage	V _{RPM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum average forward output rectified current at T _c =50 °C (Note 1)	I _(AV)								A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}								A
Maximum instantaneous forward voltage drop per bridge element at 4.0A	V _F								V
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =125°C	I _R								µA
Typical Thermal Resistance (Note 2)	R _{θ JA}								mA
Operating junction temperature range	T _J								°C
storage temperature range	T _{STG}								°C

Note:1. Mounted on glass epoxy PC board with 1.3mm² solder pad.

2. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C..

Ratings And Characteristic Curves

Fig. 1 Forward Current Derating Curve

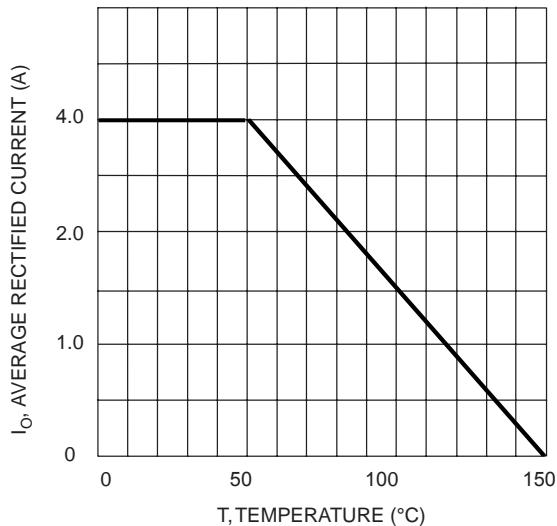


Fig. 2 Typical Fwd Characteristics

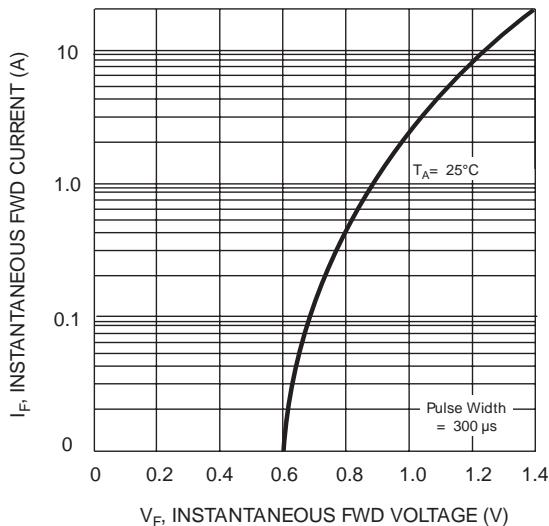


Fig. 3 Max Non-Repetitive Peak Fwd Surge Current


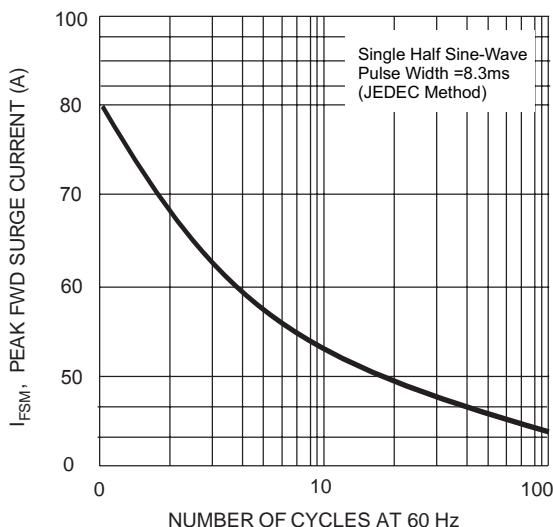


Fig. 4 Typical Junction Capacitance

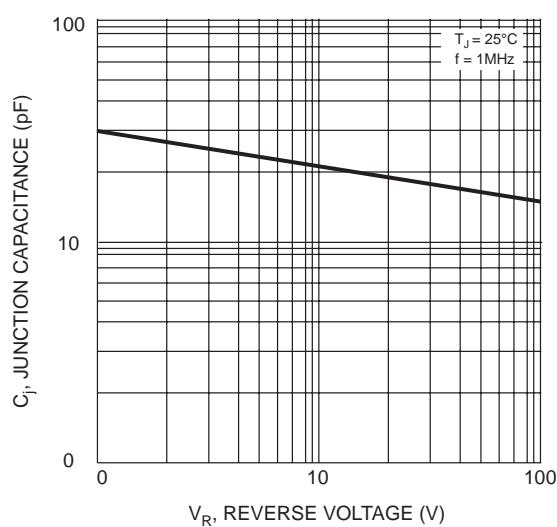

The curve above is for reference only.