



烜芯微
XUANXINWEI

KBL8005 thru KBL810

8.0A Single-Phase Silicon Bridge Rectifier
Rectifier Reverse Voltage 50 to 1000V

Features

- Ideal for printed circuit board mounting
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- Built-in printed circuit board stand-offs
- High case dielectric strength
- High temperature soldering guaranteed 265°C /10 seconds at 5 lbs (2.3kg) tension


Mechanical Data

Case: Reliable low cost construction utilizing molded plastic technique

Terminals: Plated leads solderable per MIL-STD-202, Method 208

Mounting Position: Any

Weight: 0.2 ounce, 5.6 grams (approx)

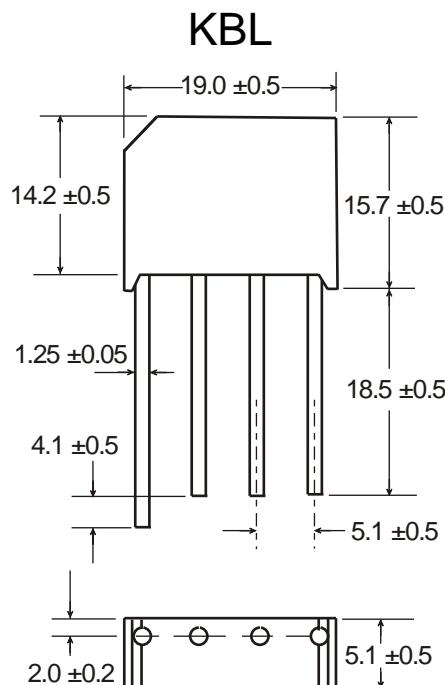

Dimensions in millimeters(1mm =0.0394")

Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.
For Capacitive load derate current by 20%.

Parameter	Symbol	KBL 8005	KBL 801	KBL 802	KBL 804	KBL 806	KBL 808	KBL 810	unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at $T_c=50^\circ\text{C}$	IF(AV)				8.0				A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM				300				A
Rating for fusing ($t<8.3\text{ms}$)	$I^2 t$				373				$\text{A}^2 \text{sec}$
Typical thermal resistance per element(1)	ReJA				2.5				$^\circ\text{C} / \text{W}$
Operating junction and storage temperature range	TJ, TSTG				-55 to + 150				$^\circ\text{C}$

Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.
For Capacitive load derate by 20 %.

Parameter	Symbol	KBL 8005	KBL 801	KBL 802	KBL 804	KBL 806	KBL 808	KBL 810	Unit
Maximum instantaneous forward voltage drop per leg at 8.0A	VF				1.1				V
Maximum DC reverse current at rated $TA =25^\circ\text{C}$ DC blocking voltage per element $TA =125^\circ\text{C}$	IR				10				μA

Notes: (1)Thermal resistance from Junction to Ambertion P.C.board mounting.

Rating and Characteristic Curves (TA=25°C Unless otherwise noted)

KBL8005 thru KBL810

Fig. 1 Derating Curve for Output Rectified Current

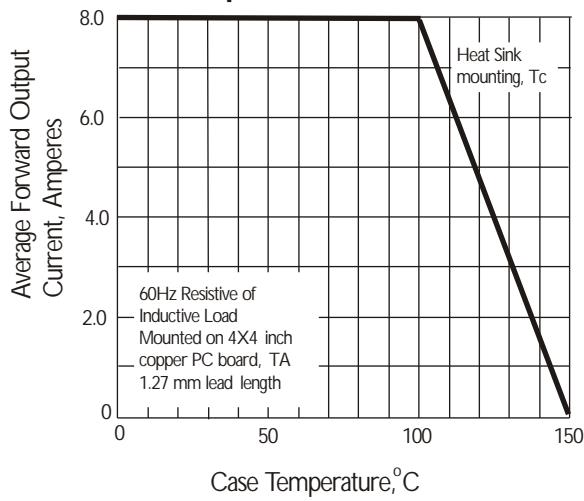


Fig. 3 Typical Instantaneous Forward Characteristics

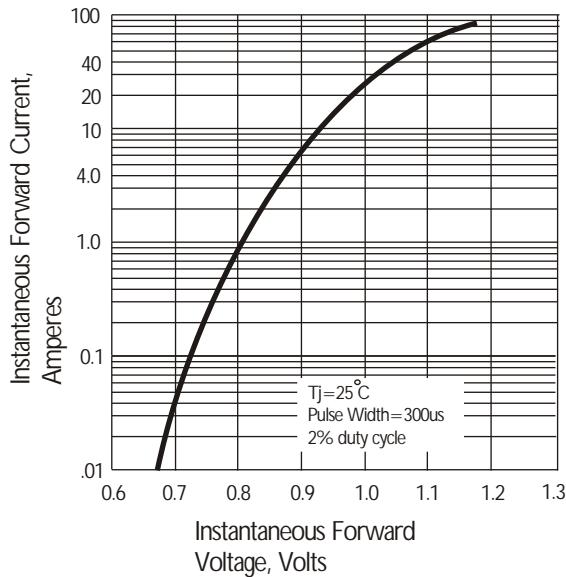


Fig. 2 Maximum Non-repetitive Peak Forward Surge Current

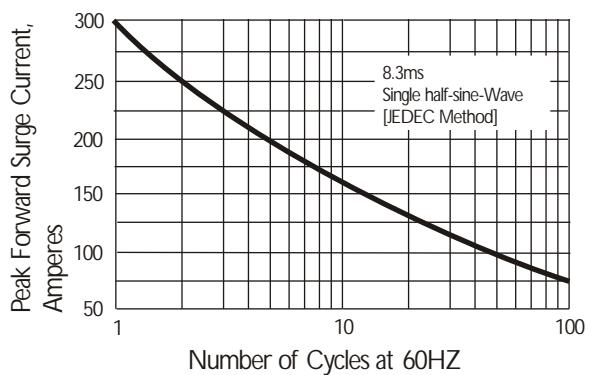


Fig. 4 Typical Reverse Characteristics

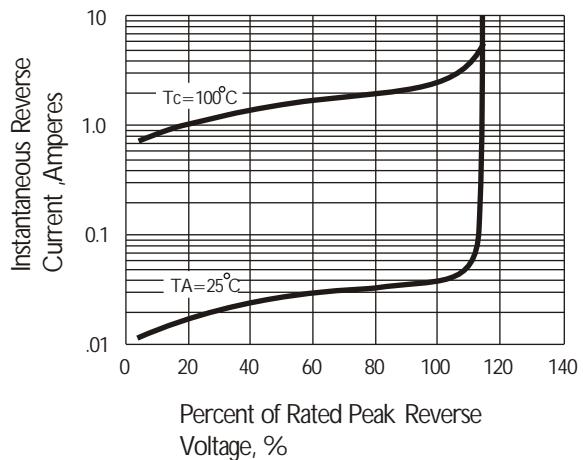


Fig. 5 Typical Junction Capacitance

